


Datasheet FLENDER couplings N-EUPEX A 140

Design according to brochure: MD10.1

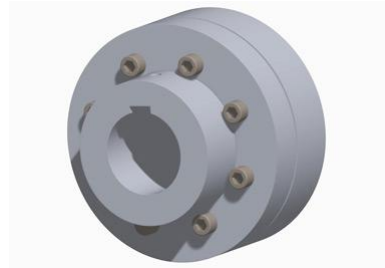

Client-Order-No:

Order-No:

Quotation-No:

Item-No:

100

Consignment-No:

Project:

Coupling - Basic data

Product selection

Series:	N-EUPEX
Type:	A
Size:	140
Scope of supply:	Complete coupling

Power ratings at the coupling

Rated torque	360 Nm
Maximum speed	4900 rpm
Fatigue torque	54 Nm
Ambient temperature	-30...+80°C

Connection 1 Part 1

Hub variant:	Hub diameter: 100 mm, Without bore
--------------	------------------------------------

Product specific options

Flexible element:	flexible elements NBR 80 Shore A
-------------------	----------------------------------

Corrosion protection

Conservation: months	Spray oil - Indoor storage up to 12
Paint coat:	No coating

Connection 2 Part 2


Hub variant:	Hub diameter: 82 mm, Without bore
--------------	-----------------------------------

Balancing

Balancing quality:	Standard balancing
--------------------	--------------------

Certificates

with declaration of compliance with the order acc. to DIN 10204-2.1
with test report acc. to DIN EN 10204-2.2

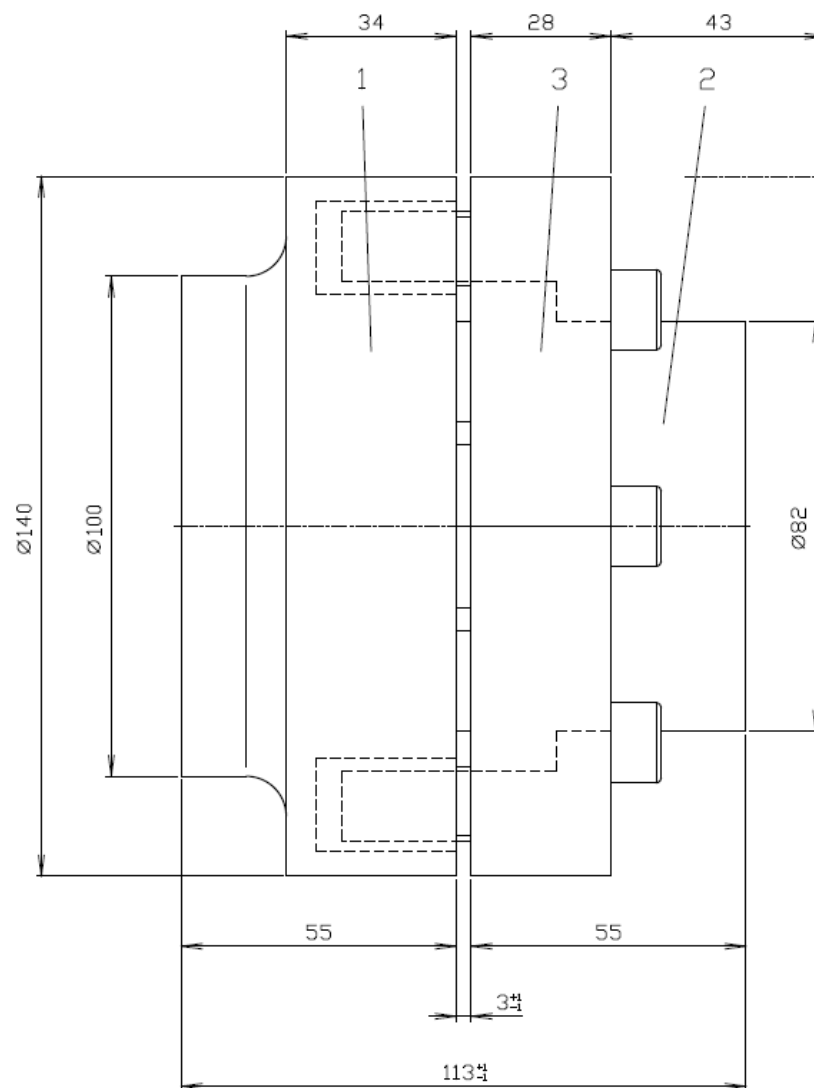

Connection left: Part 1
without bore

Connection right: Part 2
without bore