



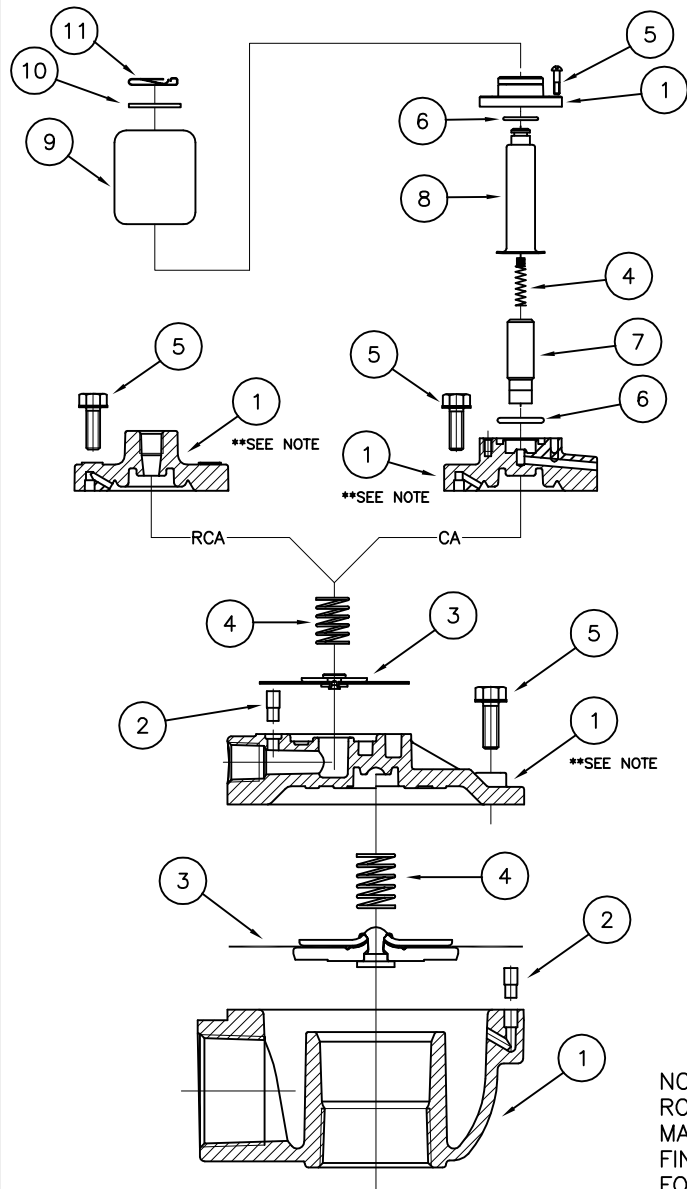

CA & RCA
45 T

GOYEN

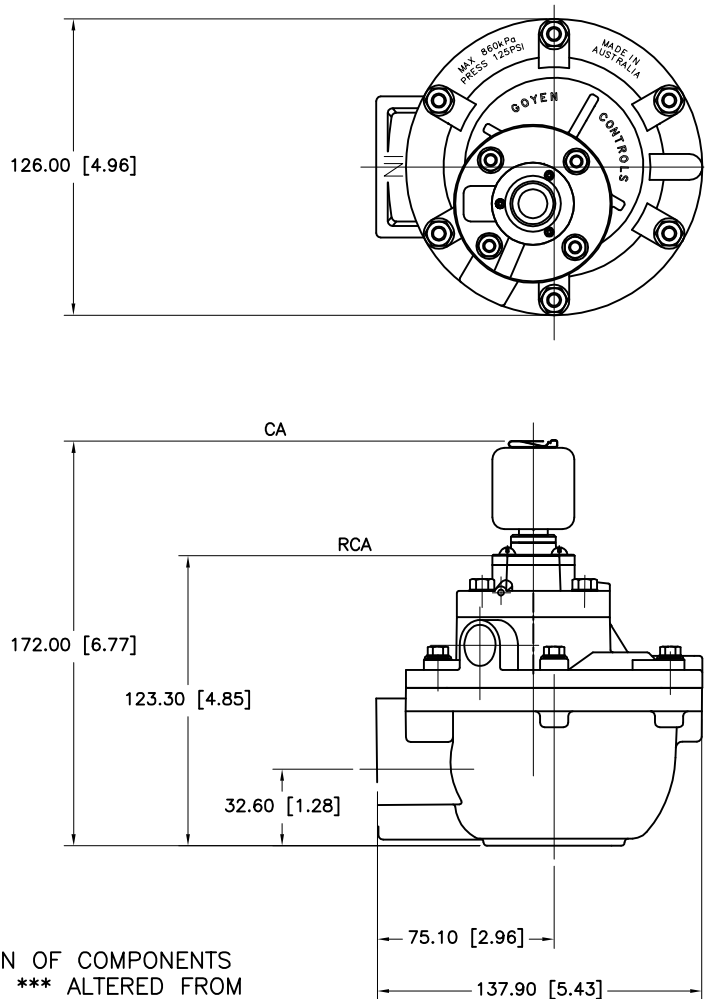

NOTE:
ROTATION OF COMPONENTS
MARKED *** ALTERED FROM
FINAL ASSEMBLY POSITION
FOR CLARITY OF CROSS
SECTION

MECHANICAL DETAILS

No	DESCRIPTION	STANDARD MATERIAL	PORT OPTIONS	HI TEMP MATERIALS	KIT No STANDARD	KIT No HI TEMP
1	BODY & COVER	ALUMINIUM DIE CAST CA313	1 1/2" RC,NPT,G	AS STANDARD	—	—
2	BLEED PIN	TURNUED ALUMINIUM	N/A	AS STANDARD	—	—
3	MAIN DIAPHRAGM	BUNA N / BUNA N RUBBER	N/A	VITON	K4502	K4503
4	MAIN SPRING	304 STAINLESS STEEL	N/A	AS STANDARD	—	—
5	SCREWS	304 STAINLESS STEEL	N/A	AS STANDARD	—	—
6	O' RINGS	BUNA N / NITRILE	N/A	VITON	—	—
7	PLUNGER ASS'Y	430 FR STAINLESS STEEL	N/A	AS STANDARD	K0380	—
8	FERRULE/IRON TOP ASS'Y	305 STAINLESS STEEL	N/A	AS STANDARD	K0380	—
9	COIL ARRGMNT.	130° RATED NYLON ENCAPSULATION	QD — 1/2 NPSC — M20x1.5	N/A	QR-K030-K0309 QD(M)-K0310-K0319 QD(N)-K0320-K0329	N/A
10	WASHER	PRESSED ALUMINIUM	N/A	AS STANDARD	—	—
11	CLIP	MECHANICAL PLATED STEEL	N/A	AS STANDARD	—	—

ELECTRICAL DETAILS

COIL VOLTAGE	200/240 VAC, 100/120 VAC, 24 VAC, 24 VDC, 12 VDC
COIL CONNECTION	QR - DIN CONNECTION QD CONDUIT ENTRY

WEIGHTS

UNIT WEIGHT	RCA = 1.283 Kg	CA = 1.495 Kg
-------------	----------------	---------------

DOC No	CAS_DG_45T
REVISION No	2
ISSUE DATE	17.7.2002