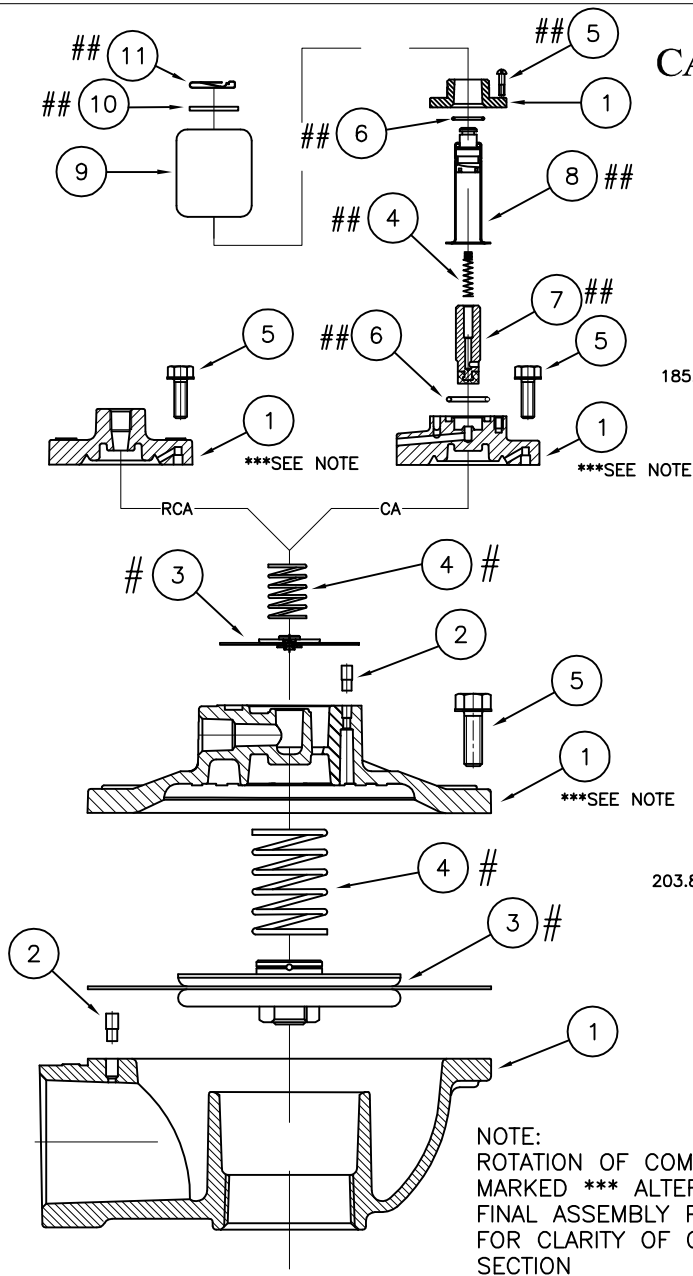


CA & RCA 50 T

GOYEN

185.50 [7.30]


203.80 [8.03]

153.30 [6.04]

40.00 [1.57]

113.40 [4.46]

205.40 [8.09]
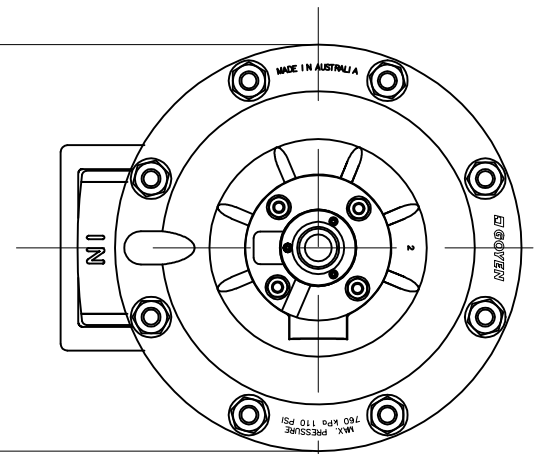
# DENOTES PARTS USED
IN DIAPHRAGM KITS## DENOTES PARTS USED
IN PILOT KITS**MECHANICAL DETAILS**

No	DESCRIPTION	STANDARD MATERIAL	PORT OPTIONS	HI TEMP MATERIALS	KIT No STANDARD	KIT No HI TEMP
1	BODY & COVER	ALUMINIUM DIE CAST CA313	2" RC,G,NPT	AS STANDARD	—	—
2	BLEED PIN	TURNUED ALUMINIUM	N/A	AS STANDARD	—	—
3	DIAPHRAGM ASS'Y	BUNA N / BUNA N RUBBER	N/A	VITON	# K5004	# K5000
4	SPRINGS	304 STAINLESS STEEL	N/A	AS STANDARD	—	—
5	SCREWS	304 STAINLESS STEEL	N/A	AS STANDARD	—	—
6	O' RINGS	BUNA N / NITRILE	N/A	VITON	—	—
7	PLUNGER ASS'Y	430 FR STAINLESS STEEL	N/A	AS STANDARD	## K0380	—
8	FERRULE/IRON TOP ASS'Y	305 STAINLESS STEEL	N/A	AS STANDARD	## K0380	—
9	COIL ARRGMNT.	130° RATED NYLON ENCAPSULATION	QD — 1/2 NPSC — M20x1.5	N/A	QR-K030-K0309 QD(M)-K0310-K0319 QD(N)-K0320-K0329	N/A
10	WASHER	PRESSED ALUMINIUM	N/A	AS STANDARD	—	—
11	CLIP	MECHANICAL PLATED STEEL	N/A	AS STANDARD	—	—

ELECTRICAL DETAILS

COIL VOLTAGE	200/240 VAC, 100/120 VAC, 24 VAC, 24 VDC, 12 VDC
COIL CONNECTION	QR - DIN CONNECTION QD CONDUIT ENTRY

WEIGHTS

UNIT WEIGHT RCA = 2.684 Kg	CA = 2.895 Kg
----------------------------	---------------

DOC No	CAS_DG_50T
REVISION No	3
ISSUE DATE	22.3.11