



Vertraglich / Confidential
Dunkermotoren GmbH
Bordentorfer Straße 1
73446 Balingen / Germany

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


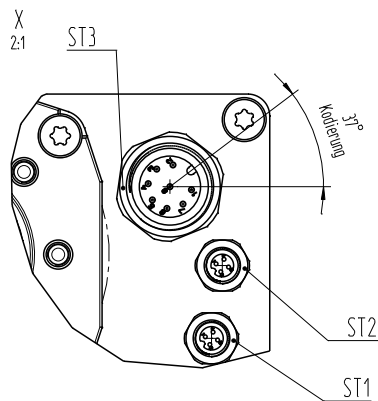


Belegung	ST1	ST2	ST3	Belegung
	Pin	Pin	Pin	
OUT	RX1-	4	---	+U _E
	RX1+	2	---	
	TX1-	3	---	PGND
	TX1+	1	---	
IN	RX0-	---	4	+U _E (+24V)
	RX0+	---	2	
	TX0-	---	3	CAN_H
	TX0+	---	1	
			8	CAN_L

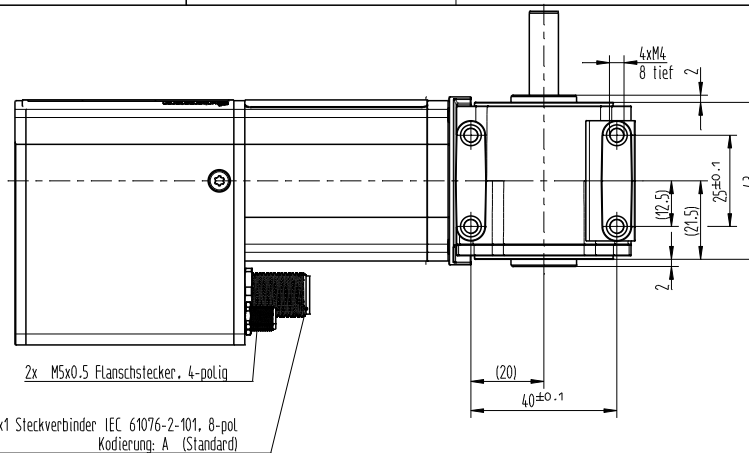


M12x1 Steckverbinder IEC 61076-2-101, 8-pol.
Kodierung: A (Standard)

ANSICHT X
ohne Getriebe

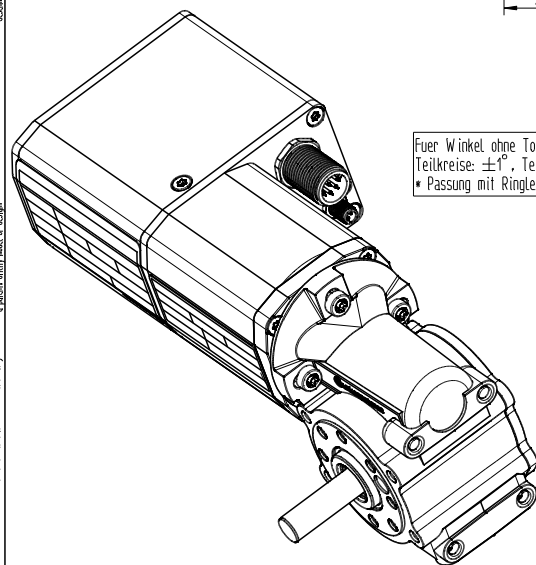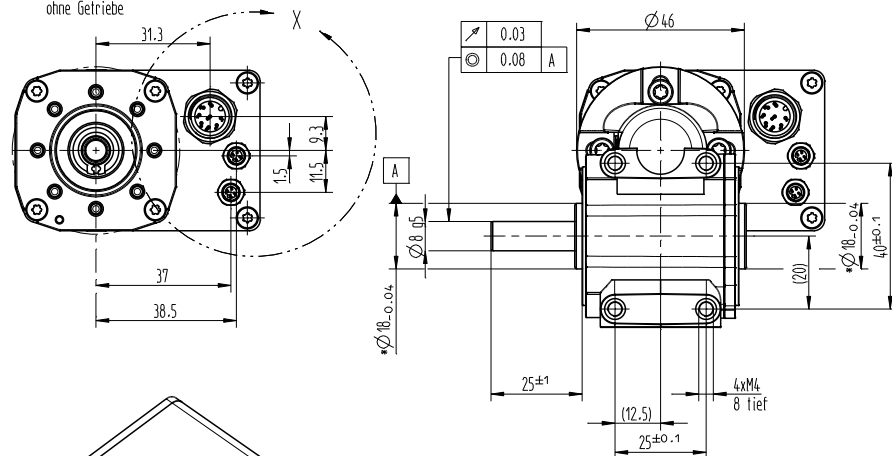

Fuer Winkel ohne Toleranzangabe gilt:
Teilkreise: $\pm 1^\circ$, Teilkreise zueinander: $\pm 2^\circ$, AS- zu NS-Darstellung: $\pm 5^\circ$
• Passung mit Ringlehre geprueft.

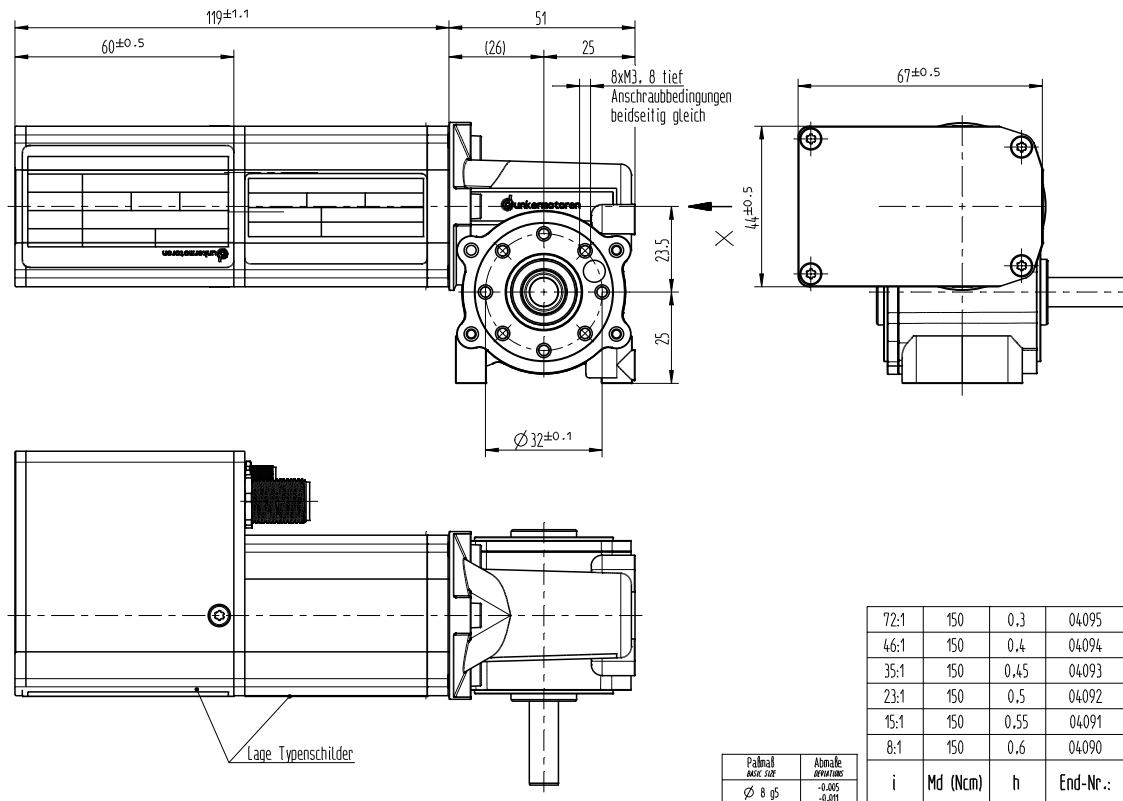

Getriebe-Grenzbelastungen:
Bei Kugellagern und bei Motordrehzahl von ≤ 3500 U/min
Drehmoment dauer = siehe Tabelle (kurzzeitig 300 Ncm)
Axiallast dauer = 150 N (kurzzeitig = 250 N)
Radiallast dauer = 250 N (kurzzeitig 500 N)
12.5mm ab Flansch

Schutzart nach DIN EN 60529
- Gehäuse IP50
- Stecker, nur mit Gegenstecker, IP67

Palmit	Almale
BASIC SIZE	DEVIATIONS
$\varnothing 8$ g5	-0.005 -0.011

72:1	150	0.3	04095
46:1	150	0.4	04094
35:1	150	0.45	04093
23:1	150	0.5	04092
15:1	150	0.55	04091
8:1	150	0.6	04090
i	Md (Ncm)	h	End-Nr.:

				ALLGEMEINTOLERANZ		OBERFLÄCHE				PANDA	
				ISO 2768 - mH		DIN EN ISO 1302				ADNAE	
				Size ISO 14405 (E)							