



Model BK Square Type Support Unit on the Fixed Side

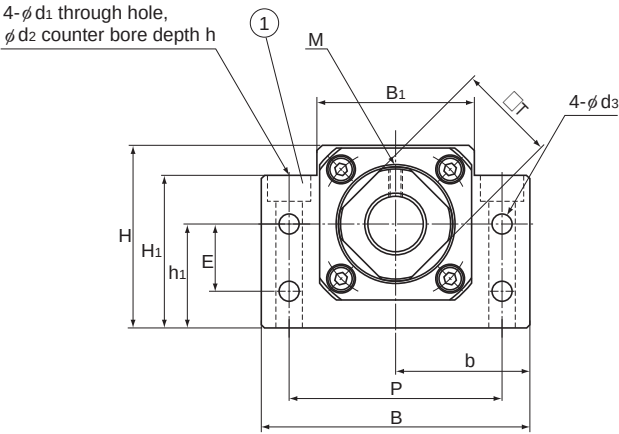

Model No.	Shaft diameter	L	L ₁	L ₂	L ₃	B	H	b ±0.02	h ₁ ±0.02	B ₁	H ₁
	d										
BK 10	10	25	5	29	5	60	39	30	22	34	32.5
BK 12	12	25	5	29	5	60	43	30	25	35	32.5
BK 15	15	27	6	32	6	70	48	35	28	40	38
BK 17	17	35	9	44	7	86	64	43	39	50	55
BK 20	20	35	8	43	8	88	60	44	34	52	50
BK 25	25	42	12	54	9	106	80	53	48	64	70
BK 30	30	45	14	61	9	128	89	64	51	76	78
BK 35	35	50	14	67	12	140	96	70	52	88	79
BK 40	40	61	18	76	15	160	110	80	60	100	90

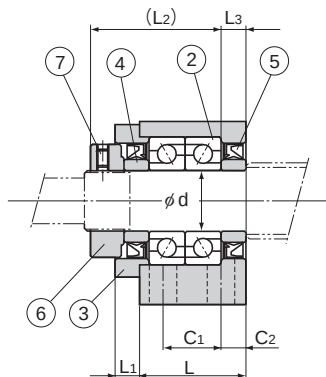

Unit: mm

	E	P	C ₁	C ₂	d ₃	d ₁	d ₂	h	M	T	Bearing used	Mass kg
	15	46	13	6	5.5	6.6	10.8	5	M3	16	7000 equivalent (DF P5)	0.39
	18	46	13	6	5.5	6.6	10.8	1.5	M3	19	7001 equivalent (DF P5)	0.41
	18	54	15	6	5.5	6.6	11	6.5	M3	22	7002 equivalent (DF P5)	0.57
	28	68	19	8	6.6	9	14	8.5	M4	24	7203 equivalent (DF P5)	1.27
	22	70	19	8	6.6	9	14	8.5	M4	30	7004 equivalent (DF P5)	1.19
	33	85	22	10	9	11	17.5	11	M5	35	7205 equivalent (DF P5)	2.3
	33	102	23	11	11	14	20	13	M6	40	7206 equivalent (DF P5)	3.32
	35	114	26	12	11	14	20	13	M8	50	7207 equivalent (DF P5)	4.33
	37	130	33	14	14	18	26	17.5	M8	50	7208 equivalent (DF P5)	6.5

Part No.	Part name	No. of units
1	Housing	1
2	Bearing	1 set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock Nut	1
7	Hexagonal socket-head setscrew (with a set piece)	1