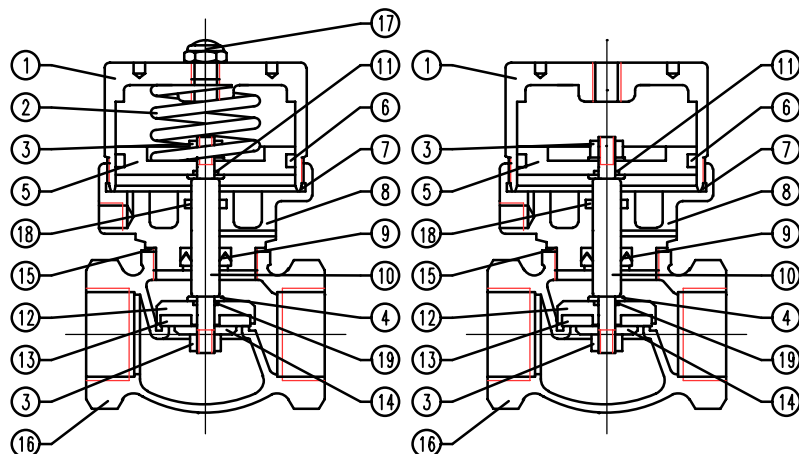


Art. "B"

**SINGLE ACTING
ACTUATOR**
**DOUBLE ACTING
ACTUATOR**

MATERIALS

1	CYLINDER	ANODIZED ALUMINIUM
2	SPRING	HARMONIC STEEL
3	* SELF-LOCKING NUT	STAINLESS STEEL
4	* WASHER	BRASS
5	PISTON	ALUMINIUM 11S
6	O-RING	NBR
7	O-RING	NBR
8	* CENTRAL BODY	BRASS
10	* STEM	STAINLESS STEEL
11	O-RING	PTFE
12	* GASKET-HOLDER PLATE	BRASS
14	* WASHER	BRASS
15	* BODY GASKET	PTFE
16	* VALVE BODY	BRONZE
17	FILTER (senc-seno versions)	BRASS
19	* GASKET	PTFE
Seal NBR		
13	* SEAL	NBR
9	* STEM GASKET	NBR
18	O-RING	NBR
Seal FPM		
13	* SEAL	FPM
9	* STEM GASKET	FPM
18	O-RING	FPM
Seal EPDM		
13	* SEAL	EPDM
9	* STEM GASKET	EPDM
18	O-RING	EPDM
*Parts in contact with the fluids intercepted		

OVERALL DIMENSIONS
WEIGHT

DN	G	A	B	C	d	E	Ch	KV	PESO
mm		mm	mm	mm	mm	mm	mm	m3/h	gr
15	1/2"	105	85	60	17	50	27	3,4	600
20	3/4"	113	85	75	22	50	36	7,9	700
25	1"	125	95	85	28	76	46	11	1300
32	1"1/4	136	103	95	37	76	55	18	1700
40	1"1/2	170	130	110	43	88	60	28	2450
50	2"	180	135	120	55	88	72	44	2900

