




Counterbalance, On A and B, Cross-Piloted




Pilot-To-Open Check, On A and B, Cross-Piloted



Reducing, On A and B, drain to opposite port



Reducing/Relieving, On A and B, Tanks and Drains to Opposite Port



## CONFIGURATION

/S Modifier 65-45-12 Ductile Iron, Buna-N, Blackened

## NOTES

**Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

## INCLUDED COMPONENTS

Part	Description	Quantity
500-001-114	O-Ring	2
500-001-121	O-Ring	4
811-001-002	Locating Pin	1
A330-006-004	SAE Plug	2

## MANIFOLD FACES

## CONFIGURATION OPTIONS

Model Code Example: HBY/S


MODIFIER (IS)

/S 65-45-12 Ductile Iron, Buna-N, Blackened

6061-T651 Aluminum, Buna-N

/V 6061-T651 Aluminum, Viton

/Y 65-45-12 Ductile Iron, Viton, Blackened

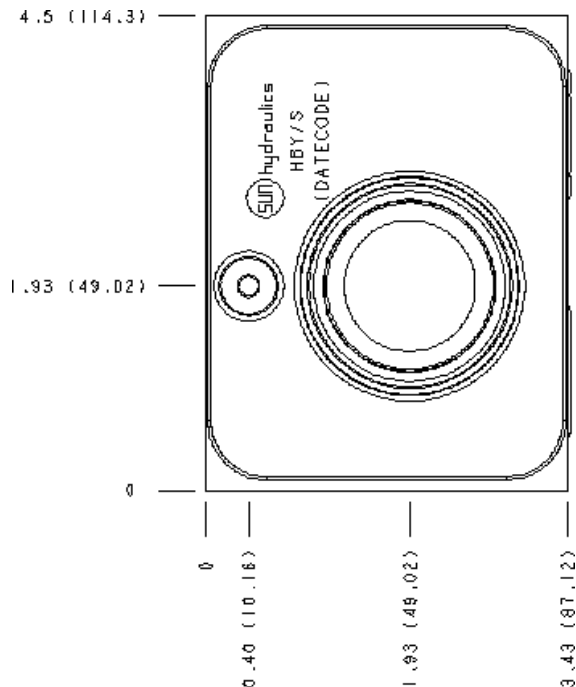


## TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 08
Body Features	On A and B with cross pilot
Stack Height	87 mm


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


Face 5

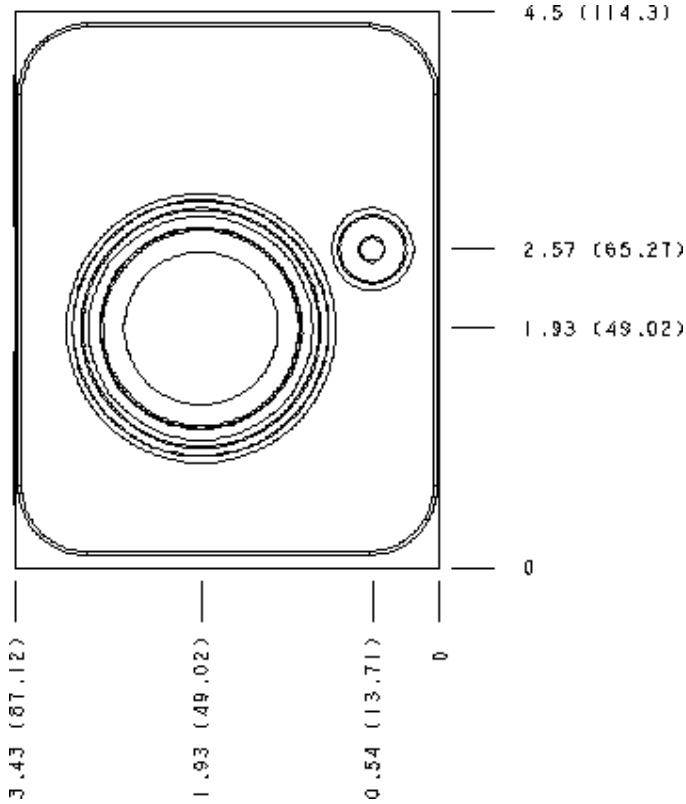

Face 6

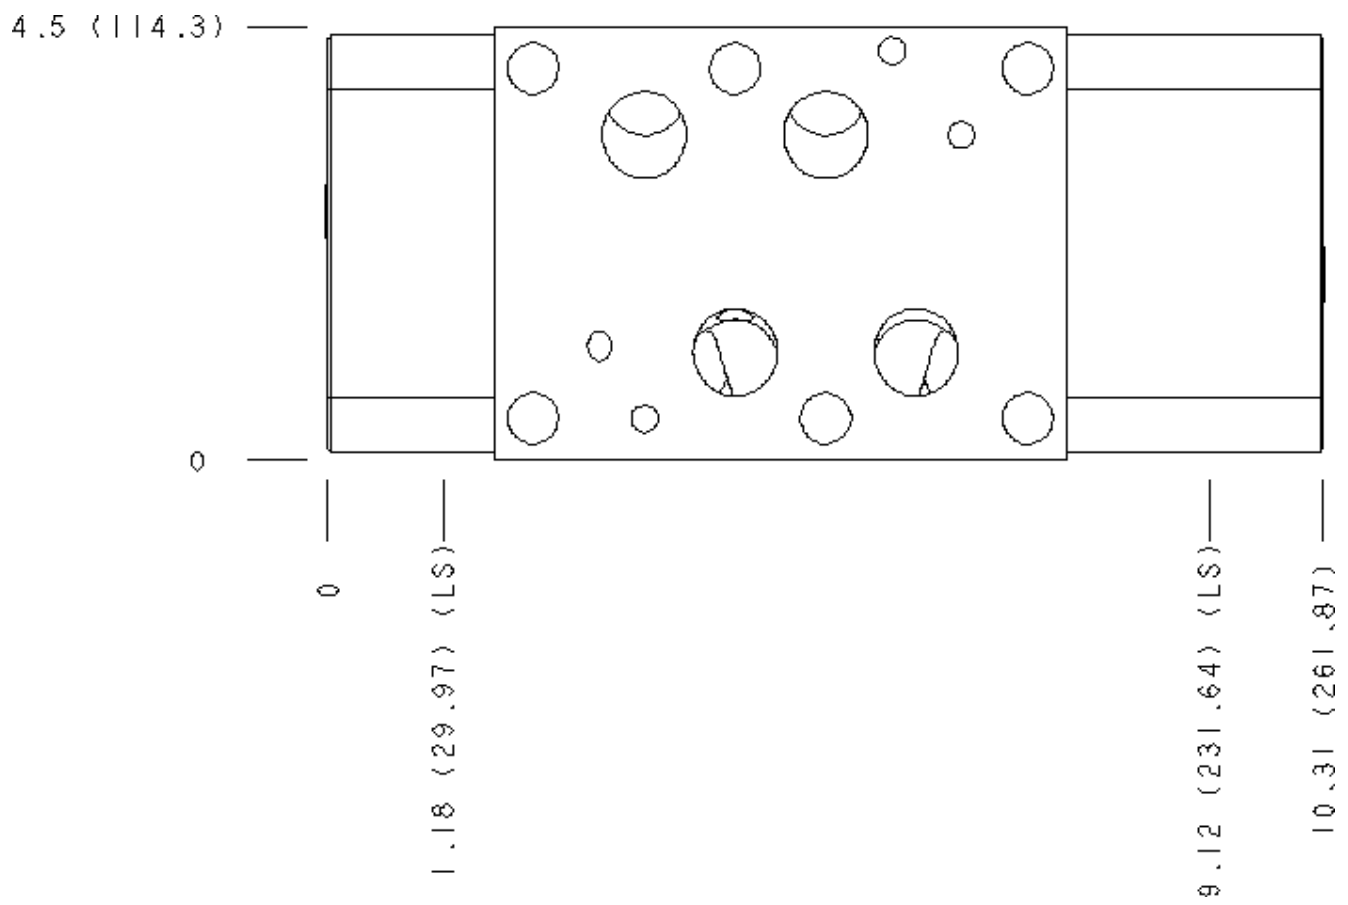

**Face 7**

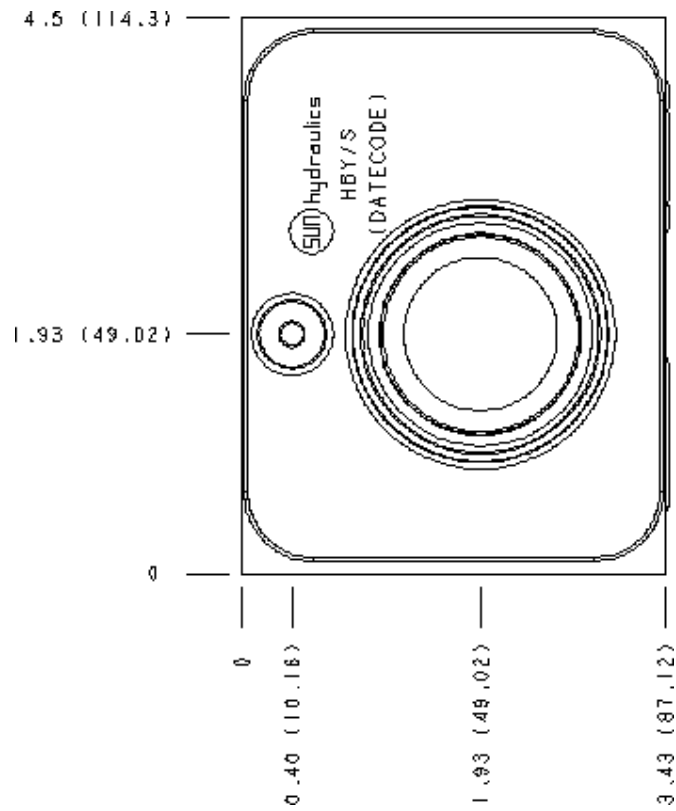

**Face 8**

