


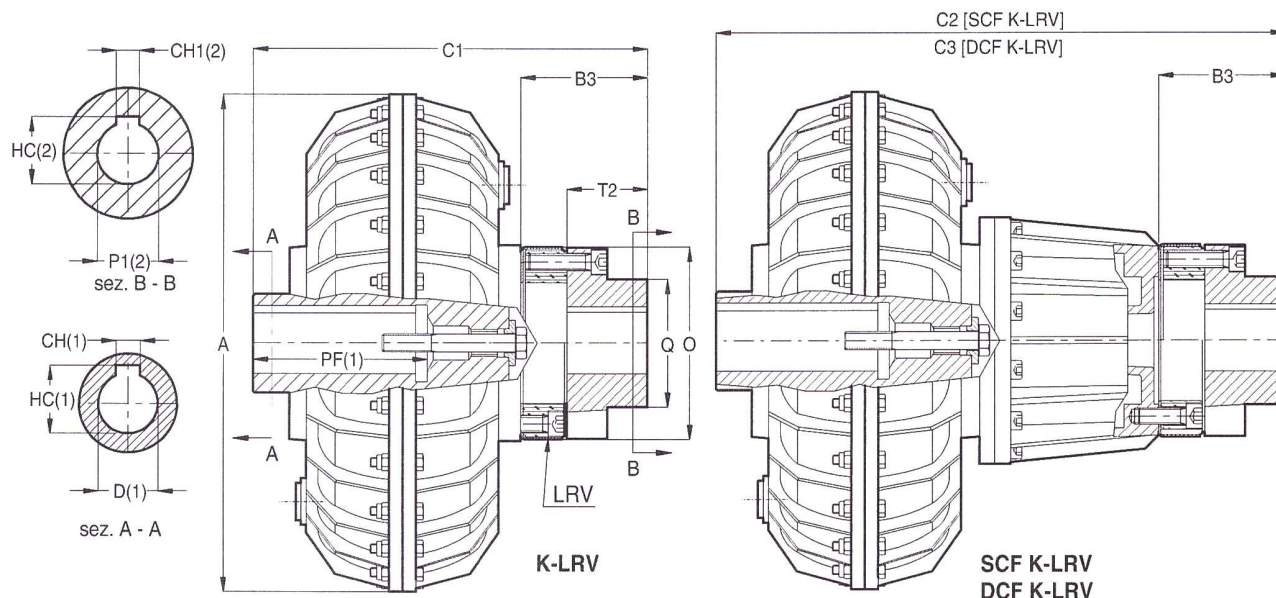

NOTE: (1) FOR BORE AND KEYWAY DIMENSIONS SEE SHEET 10-019D
(2) UPON REQUEST: BORE P1 MACHINED SEE SHEET 10-023A

Size.	K-LRV										SCF K-LRV			DCF K-LRV			
	Dimensions mm										Weight	Dimensions mm		Weight	Dimensions mm		Weight
	Type	D	A	B3	C1	O	P1 Max.	Q	T2	Kg. *	Type	C2	Kg. *	Type	C3	Kg. *	
10	K-1-LRV-1 K-3-LRV-1	14-19-24 28	193	50	148 164	84	28	45	30	4,7	-	-	-	-	-	-	
20	K-1-LRV-2 K-3-LRV-2	19-24-28 38	230	69	194 204	104	38	56	45	7,6	-	-	-	-	-	-	
30	K-01-LRV-3	28-38-42	290	87	249	130	48	68	55	16,2	SCF K-02-LRV-3	304	18,6	DCF K-02-LRV-3	344	19,2	
	K-03-LRV-3	48 **			277					16,2	SCF K-03-LRV-3	332	18,6	DCF K-03-LRV-3	372	19,2	
	K-04-LRV-3	55			306					17,2	SCF K-04-LRV-3	361	19,6	DCF K-04-LRV-3	401	20,2	
30P	K-01-LRV-3	28-38-42	327	87	249	130	48	68	55	24	SCF K-02-LRV-3	304	26,4	DCF K-02-LRV-3	344	27	
	K-03-LRV-3	48 **			277					24	SCF K-03-LRV-3	332	26,4	DCF K-03-LRV-3	372	27	
	K-04-LRV-3	55			306					25	SCF K-04-LRV-3	361	27,4	DCF K-04-LRV-3	401	28	
40P	K-01-LRV-4 K-02-LRV-4	38-42-48-55 60	338	96	294	158	60	91	60	27,2	SCF K-02-LRV-4 SCF K-02-LRV-4	352	30,9	DCF K-02-LRV-4 DCF K-02-LRV-4	424	32,4	
50	K-02-LRV-5	42-48-55-60-65	430	110	289	176	70	106	70	37,6	SCF K-02-LRV-5	369	43,4	DCF K-02-LRV-5	444	45,6	
55	K-02-LRV-5	42-48-55-60-65	430	110	321	176	70	106	70	47,6	SCF K-02-LRV-5	401	53,4	DCF K-02-LRV-5	476	55,6	
	K-03-LRV-5	75			320						400	DCF K-03-LRV-5		475			
60	K-02-LRV-6	48-55-60-65-75	520	124	316	195	80	121	80	59	SCF K-02-LRV-6	406	65,3	DCF K-02-LRV-6	486	69,7	
	K-03-LRV-6	80			346						436	DCF K-03-LRV-6		516			
65	K-02-LRV-6	55-60-65-75-80	520	124	364	195	80	121	80	76,9	SCF K-02-LRV-6	454	85,3	DCF K-02-LRV-6	534	89,7	
70P	K-2N-LRV-7	65-75-80-90	640	140	380	236	100	146	90	104,3	SCF K-2N-LRV-7	490	117,3	DCF K-2N-LRV-7	605	124,3	
	K-3N-LRV-7	100			420						530	DCF K-3N-LRV-7		645			
75P	See type "K-FRV"										See type "SCF K-FRV"			See type "DCF K-FRV"			
80P	Available with flexible coupling ROTOPIN AB - See type "K-AB"										See type "SCF K-AB"			See type "DCF K-AB"			
85P																	
90P																	
95P																	

* Weight with oil - ** Reduced keyway - Standard bores in heavy type